


ABS and PVC DWV pipes

ABS & PVC Schedule 40 Pipe Dimensions

Nominal Size	Average O.D., in.	Average I.D., in.	Min. Wall Thickness, in.
1¼	1.660	1.380	0.140
1½	1.900	1.610	0.145
2	2.375	2.067	0.154
3	3.500	3.068	0.216
4	4.500	4.026	0.237
6	6.625	6.065	0.280
8*	8.625	7.981	0.322
10*	10.750	10.020	0.365
12*	12.750	11.938	0.406

*These sizes of ABS pipe are not currently covered in ASTM D 2661.

Cast Iron Hubless Soil pipe

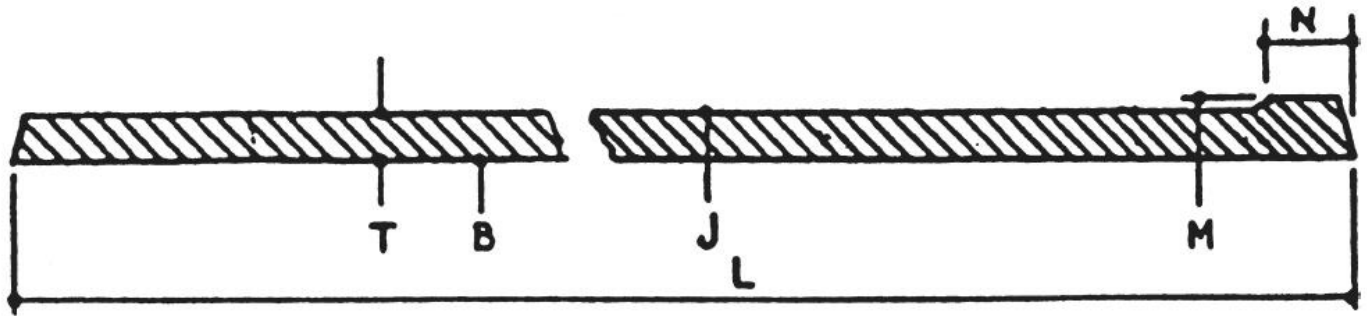

Size Availability in Inches (mm)	Barrel I.D. B in Inches (mm)	Barrel O.O. J in Inches (mm)	T NOM in Inches (mm)	T MIN in Inches (mm)	Laying Length L of 10 ft Pipe in Inches (m)
1-1/2 (38)	1.50± 0.09 (38.1 ± 2.29)	1.90± 0.06 (48.26 ± 1.52)	0.16 (4.0)	0.13 (3.3)	120 (3.04)
2 (50)	1.96 ± 0.09 (49.8 ± 2.29)	2.35± 0.09 (59.69 ± 2.29)	0.16 (4.0)	0.13 (3.3)	120 (3.04)
3 (76)	2.96 ± 0.09 (75.2 ± 2.29)	3.41 ± 0.09 (86.61 ± 2.29)	0.16 (4.0)	0.13 (3.3)	120 (3.04)
4 (101)	3.94± 0.09 (100.08± 2.29)	4.38+0.09-0.05 (111.25+2.29-1.27)	0.19 (4.8)	0.15 (3.81)	120 (3.04)
5 (127)	4.94 ± 0.09 (125.48 ± 2.29)	5.30 + 0.09 - 0.05 (134.62 + 2.29 - 1.27)	0.19 (4.8)	0.15 (3.81)	120 (3.04)
6 (152)	5.94± 0.09 (150.88± 2.29)	6.30+0.08-0.05 (160.02+2.29-1.27)	0.19 (4.8)	0.15 (3.81)	120 (3.04)
8 (203)	7.94± 0.13 (201.68 ± 3.3)	8.38+0.13-0.09 (212.85 + 3.3 - 2.29)	0.23 (5.8)	0.17 (4.32)	120 (3.04)
10 (254)	10.00 ± 0.13 (254 ± 3.3)	10.56 ± 0.09 (268.22 ± 2.29)	0.28 (7.1)	0.22 (5.59)	120 (3.04)
12 (304)	11.94± 0.09 (303.28± 2.29)	12.50± 0.09 (317.5 ± 2.29)	0.28 (7.1)	0.22 (5.59)	120 (3.04)
15 (381)	15.11 ± 0.09 (383.79 ± 2.29)	15.83 ± 0.09 (402.8 ± 2.29)	0.36 (9.1)	0.30 (7.62)	120 (3.04)